




### Filter Element: 12.5-32-60

Technical Specification	
<b>Description</b>	Disposable Particulate Filter Element
<b>Materials of Construction</b>	Borosilicate Glass Microfibres bonded with Epoxide Ester resin only
<b>Filtration Efficiency</b>	Better than 99.5+% removal of 0.1 micron particles
<b>Air Flow Resistance</b>	Less than 1.0KPa at 6m/min in air at 25°C
<b>Dimensions</b>	I.D. - 12.5mm $\pm$ 0.25mm
	O.D. - 17.0mm $\pm$ 1.5mm
	Length - 32.5mm $\pm$ 0.25mm
<b>Strength (dry)</b>	Burst minimum - 0.8 Bar
	Collapse minimum - 1.2 Bar
<b>Temperature Resistance</b>	-50°C to +150°C maximum air
<b>Chemical Resistance</b>	Resistant to all mineral, vegetable
	And synthetic compressor lubricants
	Consult chemical resistance chart for Other gases and liquids

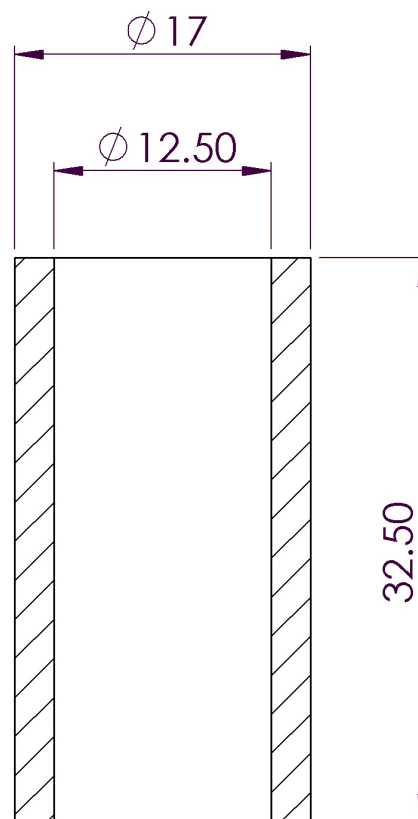

For further specific information please contact our Technical Department  
This is a guide only

<b>Headline Filters Limited Mill Hall Business Estate</b> <b>Aylesford</b> <b>Kent, ME20 7JZ</b> <b>www.headlinefilters.com</b> <b>info@headlinefilters.com</b>	<b>Filter Element: 12.5-32-60</b>		THE COPYRIGHT OF THIS DRAWING IS RESERVED BY HEADLINE FILTERS. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY, OR IN PART WITHOUT CONSENT IN WRITING.
	<b>Material:</b> Borosilicate Glass Microfibres bonded with Epoxide Ester resin only		
<b>DO NOT SCALE DRAWING</b> <b>IF IN DOUBT ASK</b>			