




Filter Element: 12-43.5-60K

Technical Specification	
Description	Disposable Particulate Filter Element
Materials of Construction	Borosilicate Glass Microfibres bonded with Kynar fluorocarbon (P.V.D.F.) resin
Filtration Efficiency	Better than 99.5+% removal of 0.1 micron particles
Air Flow Resistance	Less than 1.0KPa at 6m/min in air at 25°C
Dimensions	I.D. - 12.00mm \pm 0.25mm
	O.D. - 17.25mm \pm 1.5mm
	Length - 43.50mm \pm 0.25mm
Strength (dry)	Burst minimum - 0.8 Bar
	Collapse minimum - 1.2 Bar
Temperature Resistance	-50°C to +150°C maximum air
Chemical Resistance	Resistant to all mineral, vegetable
	And synthetic compressor lubricants
	Consult chemical resistance chart for Other gases and liquids

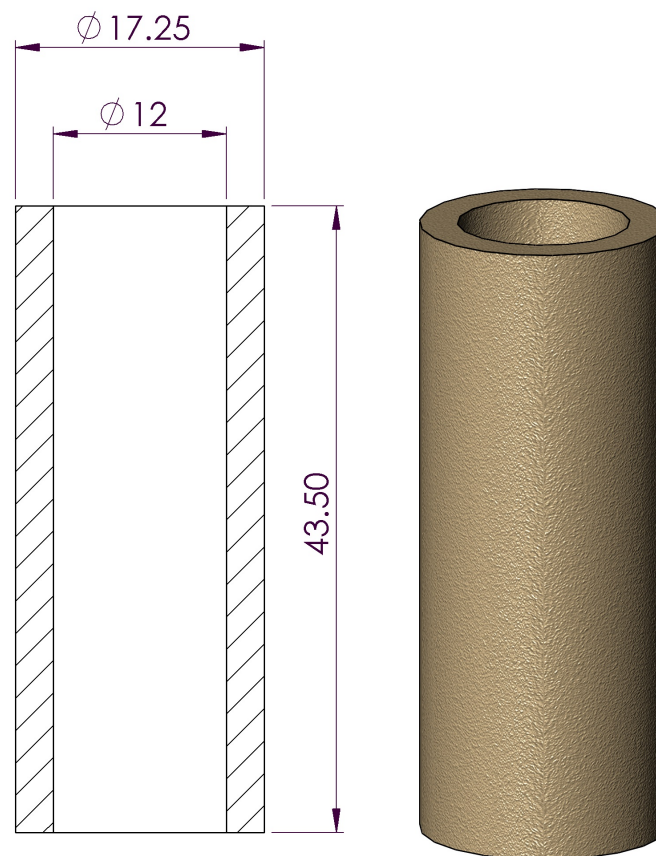

For further specific information please contact our Technical Department
This is a guide only

Headline Filters Limited Mill Hall Business Estate Aylesford Kent, ME20 7JZ www.headlinefilters.com info@headlinefilters.com	Filter Element: 12-43.5-60K		THE COPYRIGHT OF THIS DRAWING IS RESERVED BY HEADLINE FILTERS. IT IS ISSUED ON CONDITION THAT IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY, OR IN PART WITHOUT CONSENT IN WRITING.
	Material: Borosilicate Glass Microfibres bonded with Kynar fluorocarbon (P.V.D.F.) resin		
DO NOT SCALE DRAWING IF IN DOUBT ASK			